


INSTALLATION INSTRUCTIONS

www.formulabathrooms.co.uk

Please read through the complete instruction leaflet before commencing any installation work!

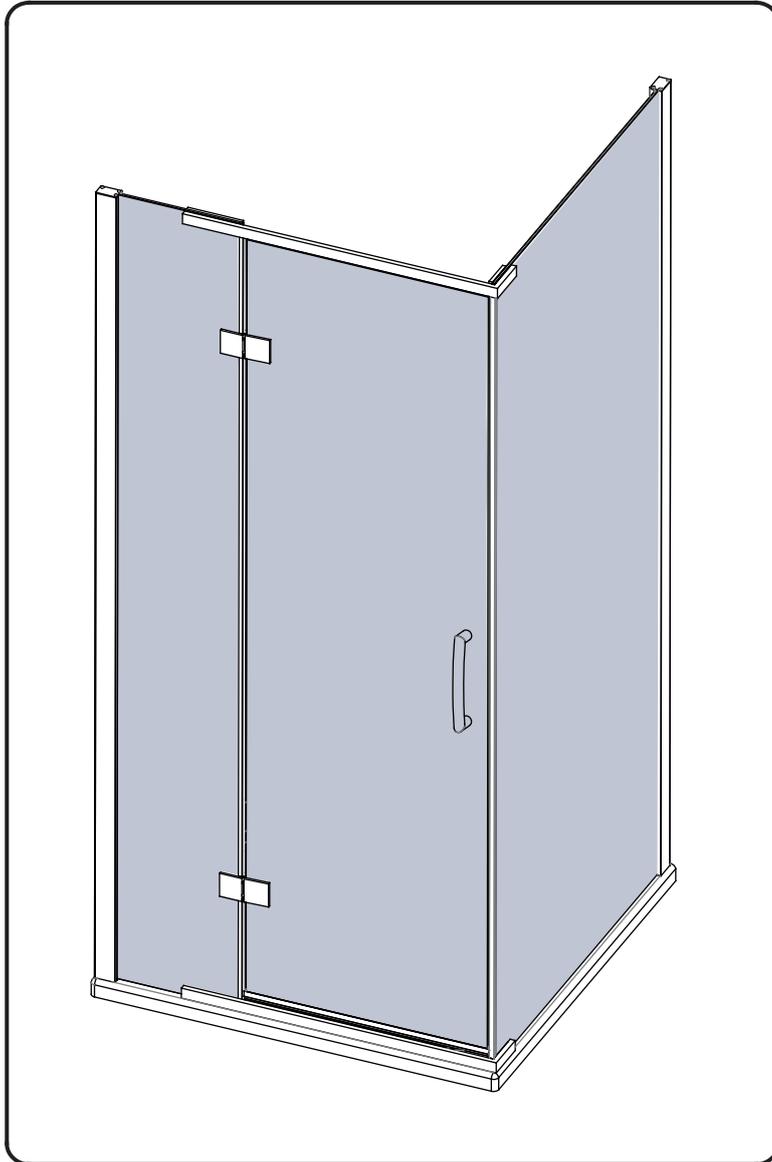


Tools Required



Drill




6mm Masonry Drill
2.75mm HSS Drill



Spirit level



Sealant Gun



Tape Measure



Pencil



PH2 TYPE
Screwdriver

Please note hand tools **NOT** supplied.

IMPORTANT

This product should be installed by a suitably qualified and proficient person. The fitting instructions should be followed carefully to ensure a proper and safe installation. Failure to follow these instructions could result in future injury.


These instructions and list of parts assume that installation is done against solid/tiled walls.

Please check this product for damage prior to starting the installation. No claims can be made after the product has been fitted.

PLEASE NOTE :The minimum and maximum adjustment sizes noted on the product brochures are based on perfectly plumb walls and trays.

USE SAFETY EYE-WEAR WHEN DRILLING

COMPONENTS AND BOX CONTENTS

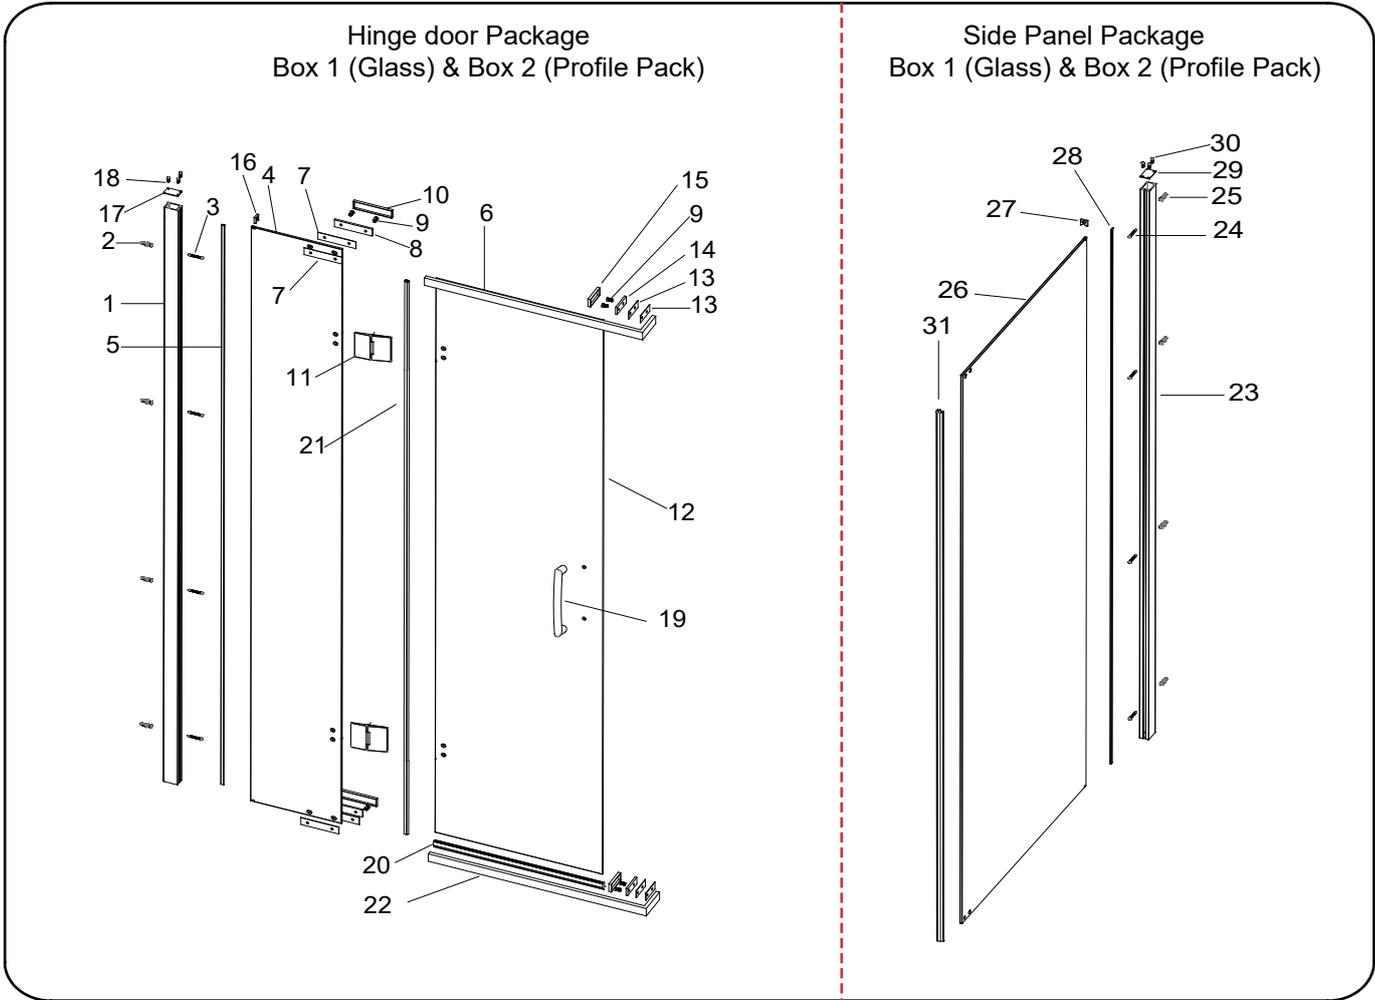


Box Contents Hinge Door Package

Box Contents Side Panel Package


SN	Description	Image	Q'ty	SN	Description	Image	Q'ty	SN	Description	Image	Q'ty
1	Wall Profile		1	12	Door Panel		1	23	Wall Profile		1
2	Wall Plug		4	13	Short Gasket		4	24	ST Screws 4x45		4
3	ST Screws 4x45		4	14	Short Rail Fixing		2	25	Wall Plug		4
4	Fixed Panel		1	15	Short Cover Cap		2	26	Side Panel Glass		1
5	Vertical Fixing Seal		1	16	Glass Blocker		1	27	Glass Blocker		1
6	Top Rail Arm		1	17	Top Cap		1	28	Vertical Fixing Seal		1
7	Long Gasket		4	18	Screw ST3.5x20		3	29	Top Cap		1
8	Long Rail Fixing		2	19	Handle		1	30	Screw ST3.5x20		3
9	Screws M6 x20		8	20	Bottom Seal		1	31	Magnet Strip		1
10	Long Cover Cap		2	21	Vertical Bubble Seal		3				
11	Hinge		2	22	Bottom Rail Arm		1				

FIXING KIT COMPONENTS, SITE CONDITIONS


Dilusso 8 Handle

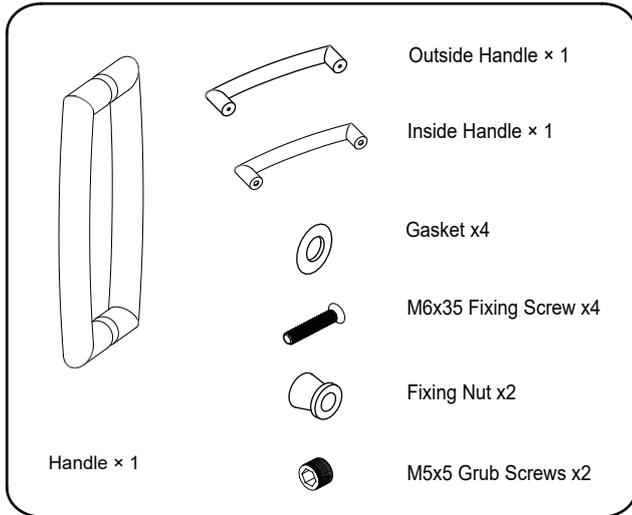


Dilusso 8 Corner Hinge Door Rail Arm

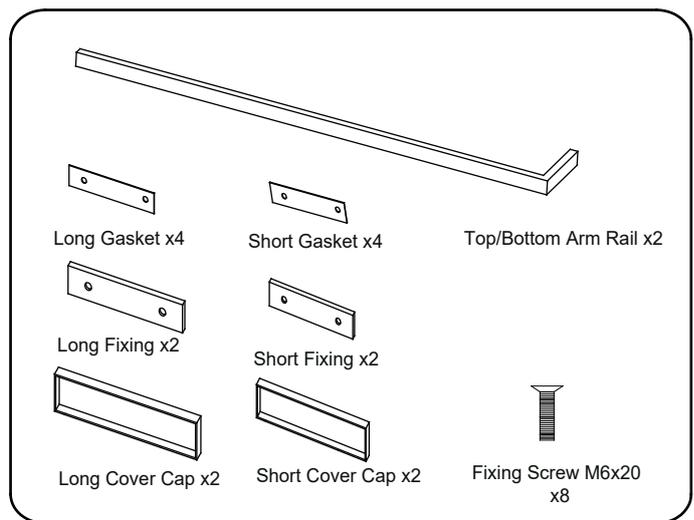

Fixing Kit-Door Metal Package

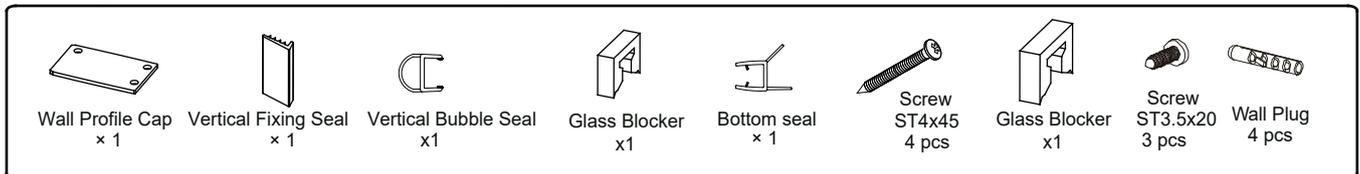

Fixing Kit-Side Panel Metal Package

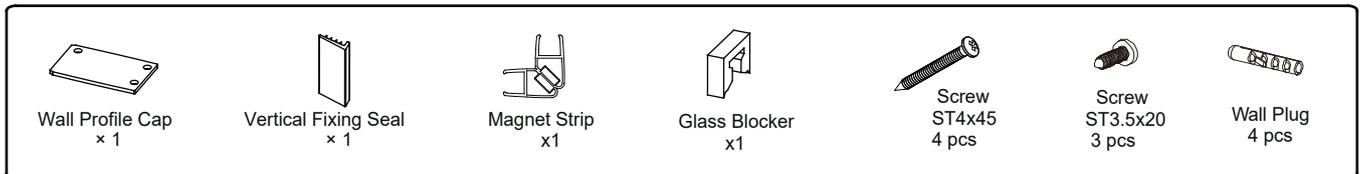

IMPORTANT - Missing Components


Please check this product for missing components prior to installation.

For spare parts visit www.formulabathrooms.co.uk

IMPORTANT - Installation site

1. Ensure the top surface of the shower tray on which the enclosure will be installed is level in every direction.
2. The tiles or other wall finishings should be effectively sealed at tray edges.
3. Tiles should extend at least to the corner of the tray and a minimum of 1.9 meters from the top of the tray.

PROCEDURE

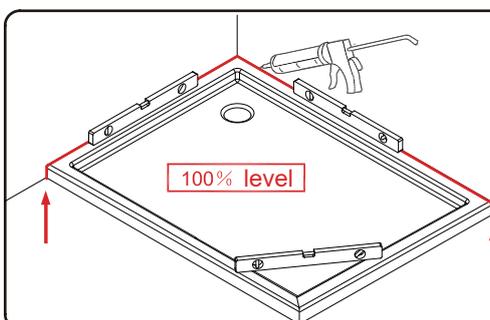


TRAY MUST BE 100% LEVEL IN ALL DIRECTIONS

Ensure the shower tray is level in all directions and is properly sealed to the wall. The wall must be tiled down to the top edge of the tray. **Do not angle out bottom tile.**

TRAY MUST BE SEALED FULLY AROUND WHERE THE TRAY MEETS THE WALL.


DILUSSO CORNER HINGE DOOR

INSTALLATION INSTRUCTIONS

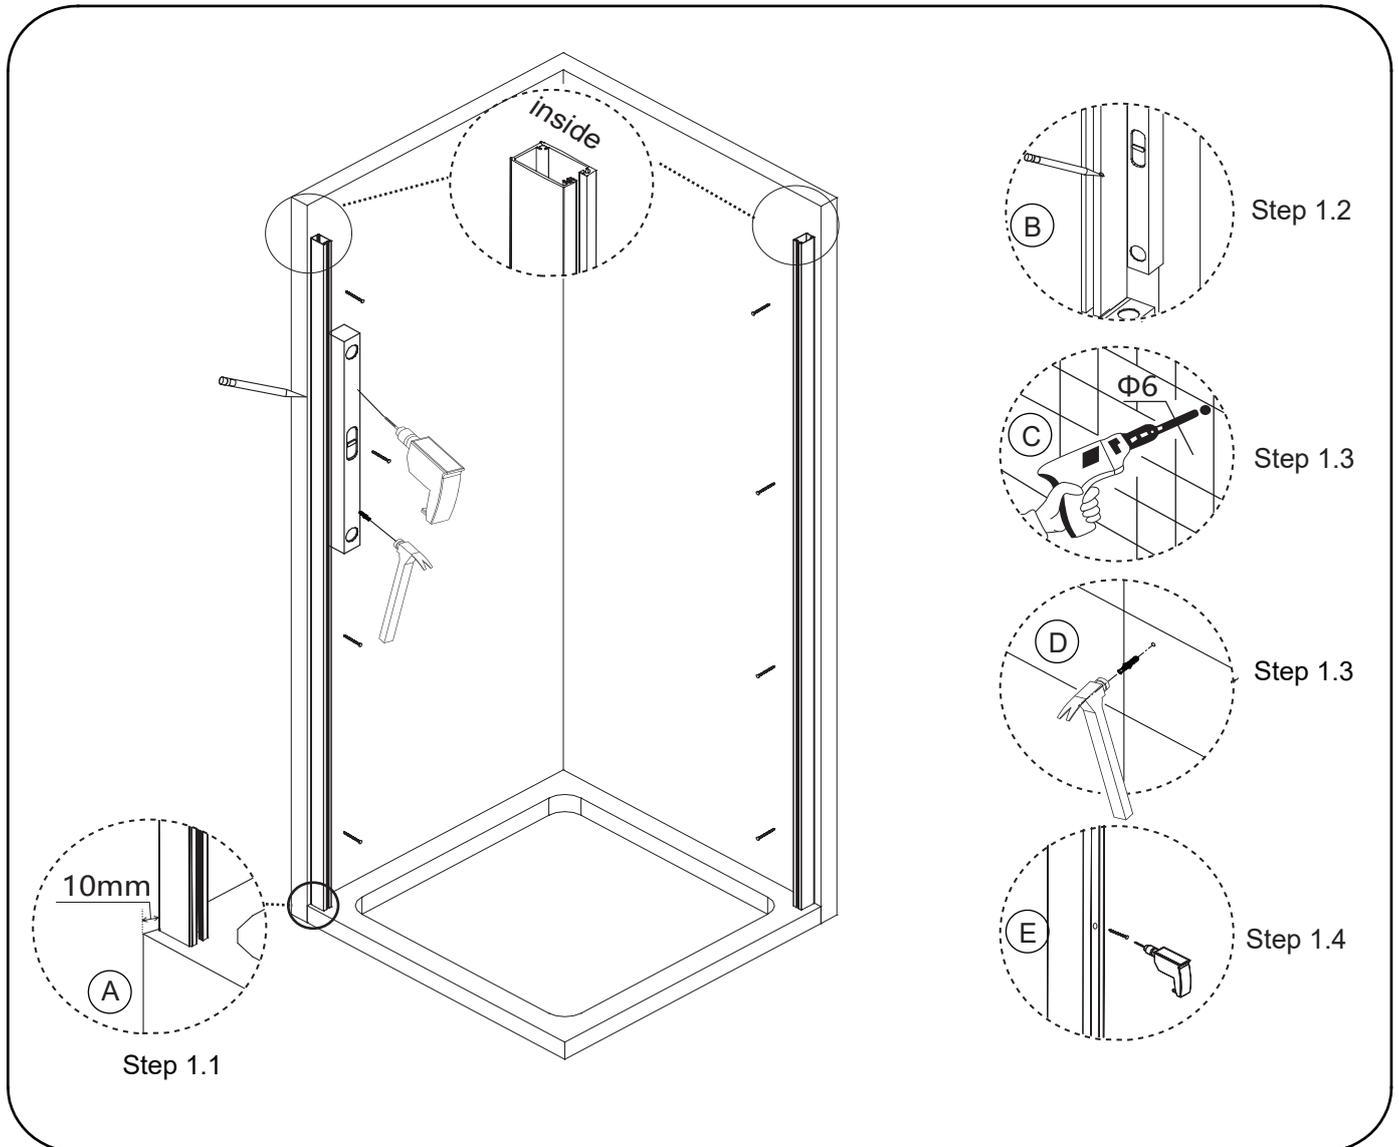


- Step 1.1 Place the wall profiles (no. 1/no. 23) to the wall (roughly 10mm away from the front of the tray). (Diagram A).
- Step 1.2 Level the profile using a spirit level. Once you are happy that the profile sits on the tray correctly, mark the wall through the 4 pre-drilled screw holes in the wall profiles (Diagram B).
- NOTE: You may find it easier to mark and drill the wall if you apply masking tape to it first.**
- Step 1.3 Remove the wall profiles and drill the marked points using a 6mm masonry drill bit. (Diagram C)
- Once this is done insert 8 × wall plugs (no. 2/25) (Diagram D)
- Step 1.4 Fix the wall profiles (no. 1/23) to wall using the screws ST4x45 (no. 3/24). (Diagram E).

INSTALLATION INSTRUCTIONS

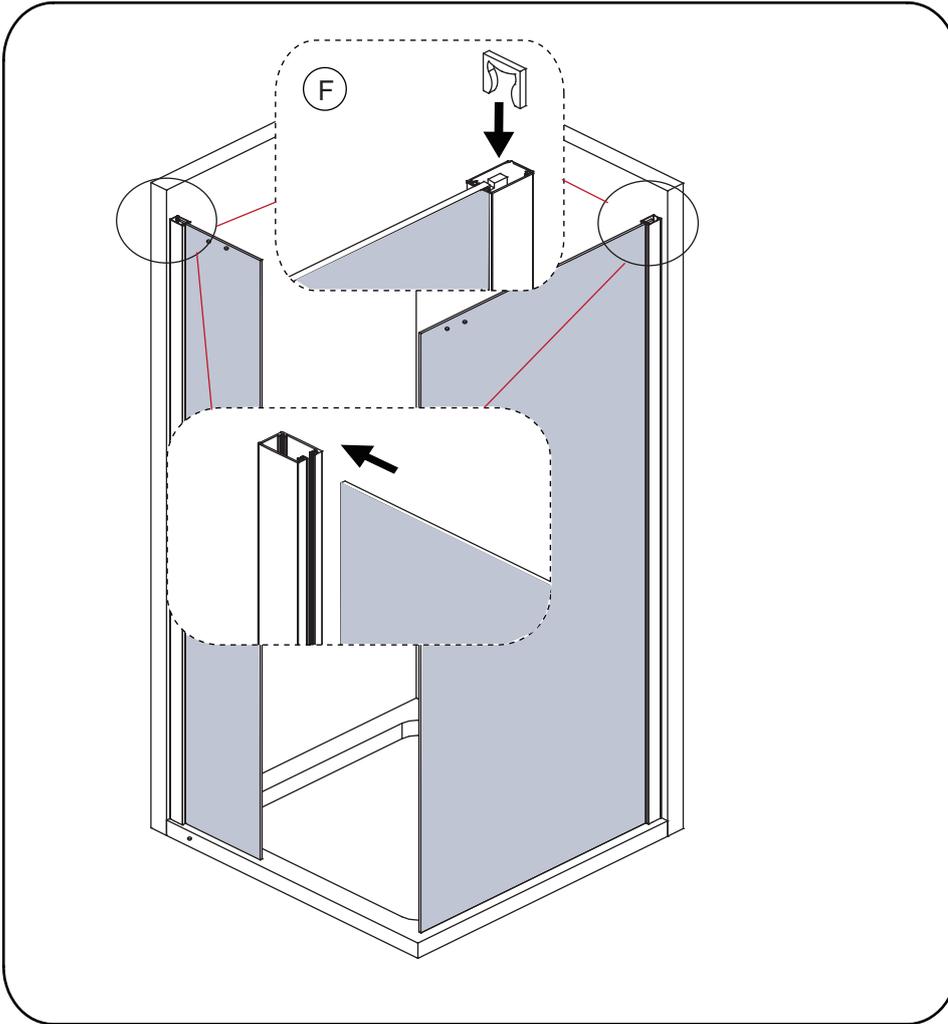

Step.2-Insert the fixed panel and side panel onto the wall profile, then fit the glass blocker (no.16/27) onto the groove at the top of the fixed panel and side panel. (Diagram F)

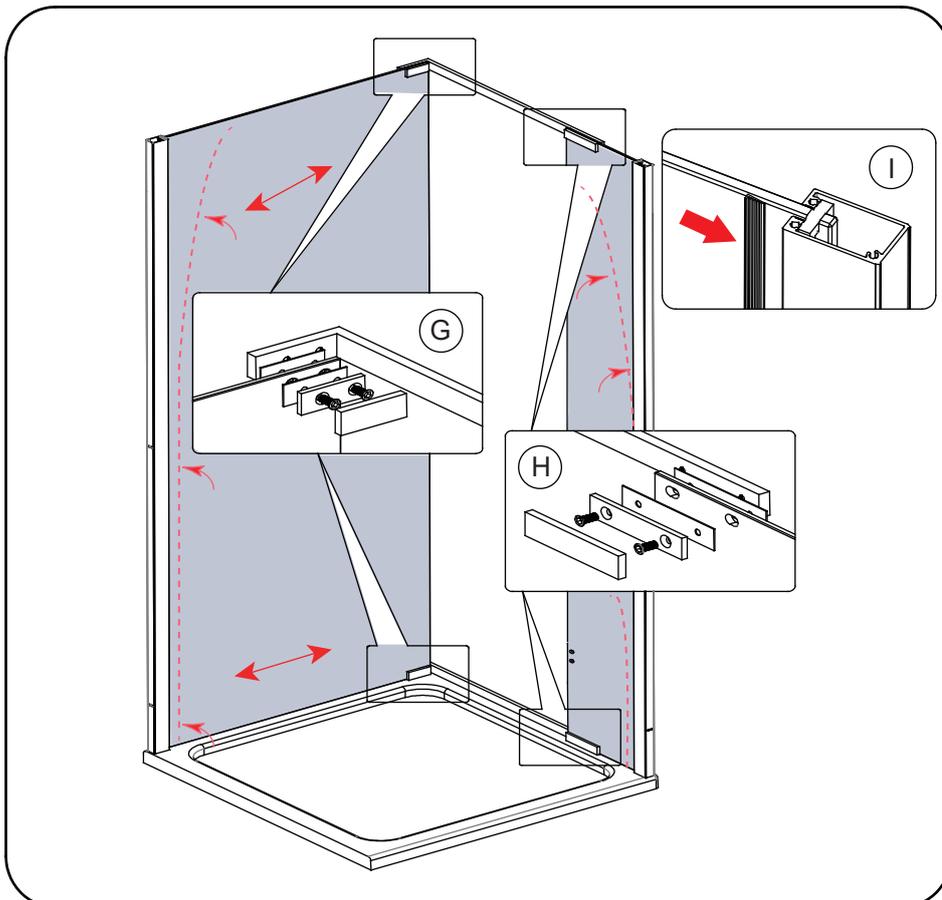


Step.3 Fix the top and bottom rail by starting from the side panel end. Ensure the short gasket (no.13) is placed on both inside and outside of the side panel. Secure the pieces together using screws M6 x20 (no.9) then fit the short cover caps (no.15) on. (Diagram G).


Next secure the fixed panel, line up the screw holes on the fixed panel with the holes on the top and bottom rail by pulling/pushing the fixed panel from the wall profile. Ensure the longer gasket (no.7) is placed on both inside and outside of the fixed panel. Secure the pieces together using screws M6x20 (no.9) then fit the longer cover caps on. (Diagram H).

Step.4 Press the vertical fixing seal (no.5/28) into the wall profiles to secure the glass panel from bottom to top. (Diagram I)

INSTALLATION INSTRUCTIONS

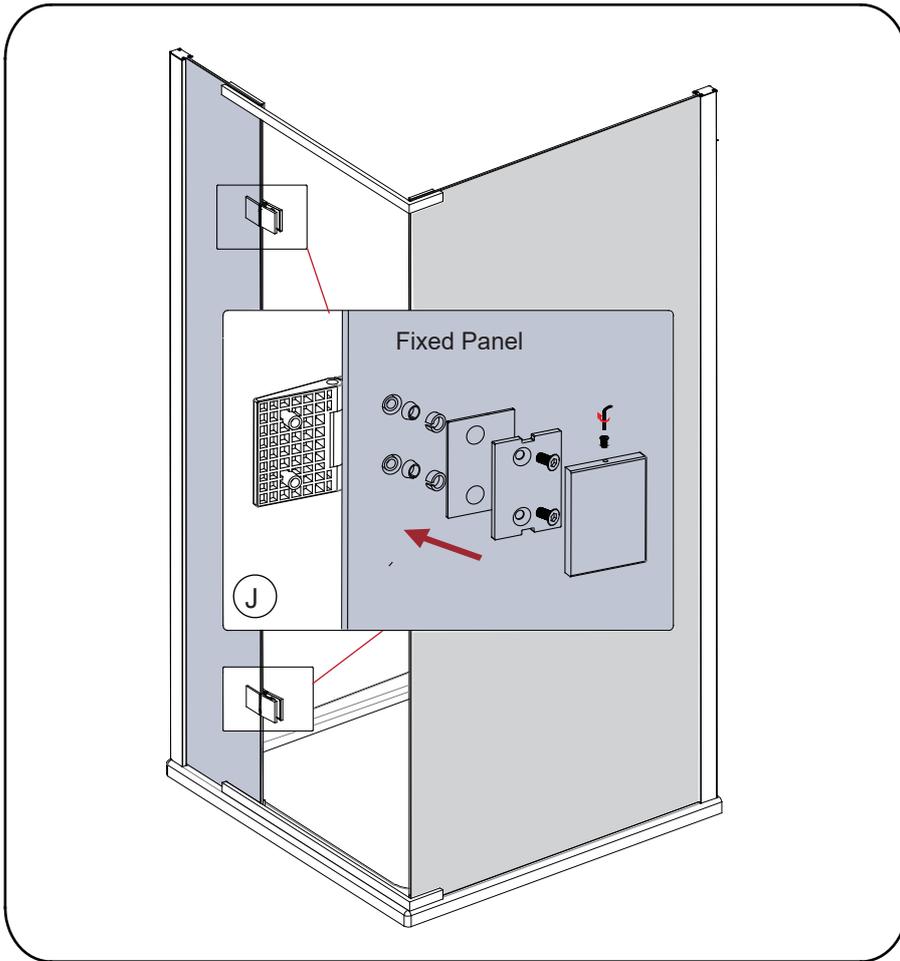


Step.5-Take apart the hinge(no.11) then fit it onto the fixed panel.Ensure the gasket is placed on both inside and outside of the glass panel.(Diagram J)

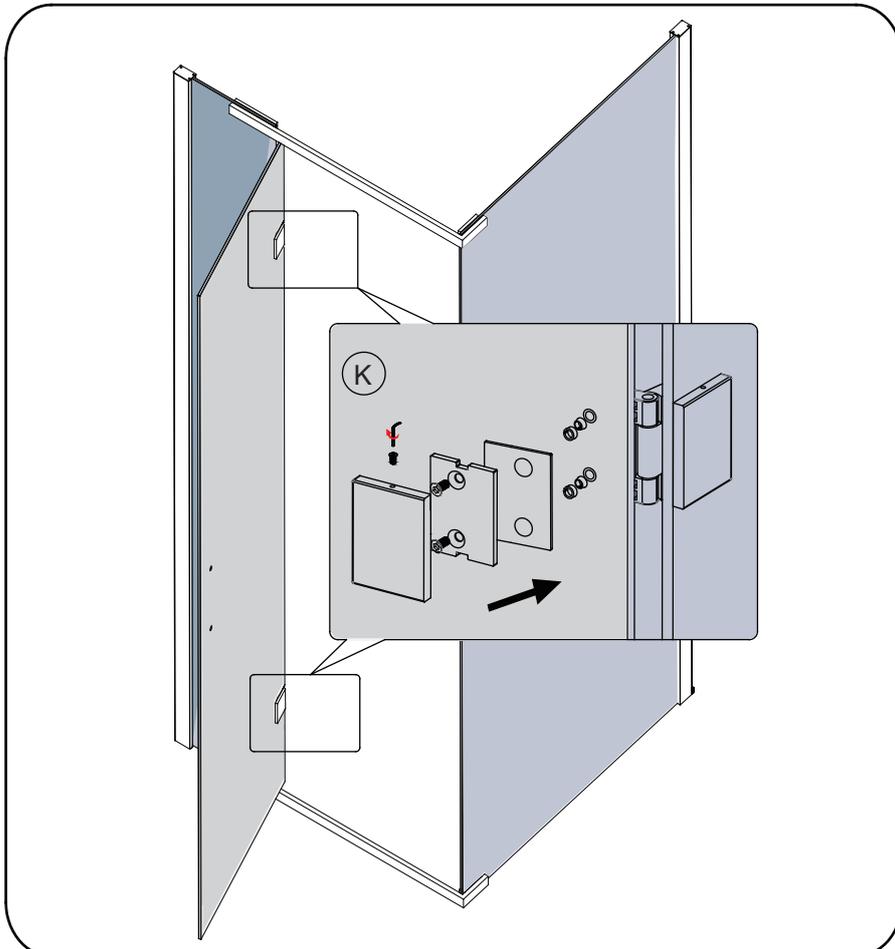

Step.6-Carefully lift the door panel (no.12) then fit it onto the hinges.Ensure the gasket is placed on both inside and outside of the glass panel, tighten up the fixing screws.Ensure the door panel is level then fit the caps to cover the screws (Diagram K).


INSTALLATION INSTRUCTIONS

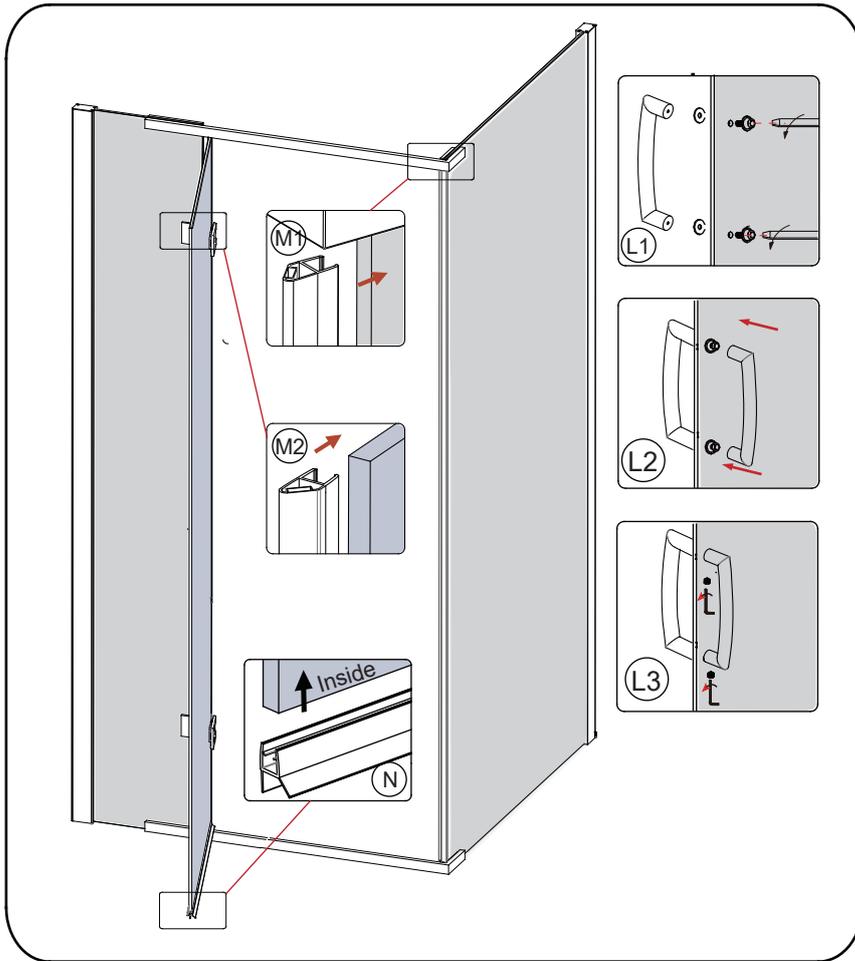

Step.7 Fit the handle (no.19) onto the door panel (Diagram L1/L2/L3).

Step8. Fit the magnet strip (no.31) on to the side panel and door panel (Diagram M1/M2).

Step 9. Fit the bottom seal (no.20) onto the bottom of the door panel (Diagram N).

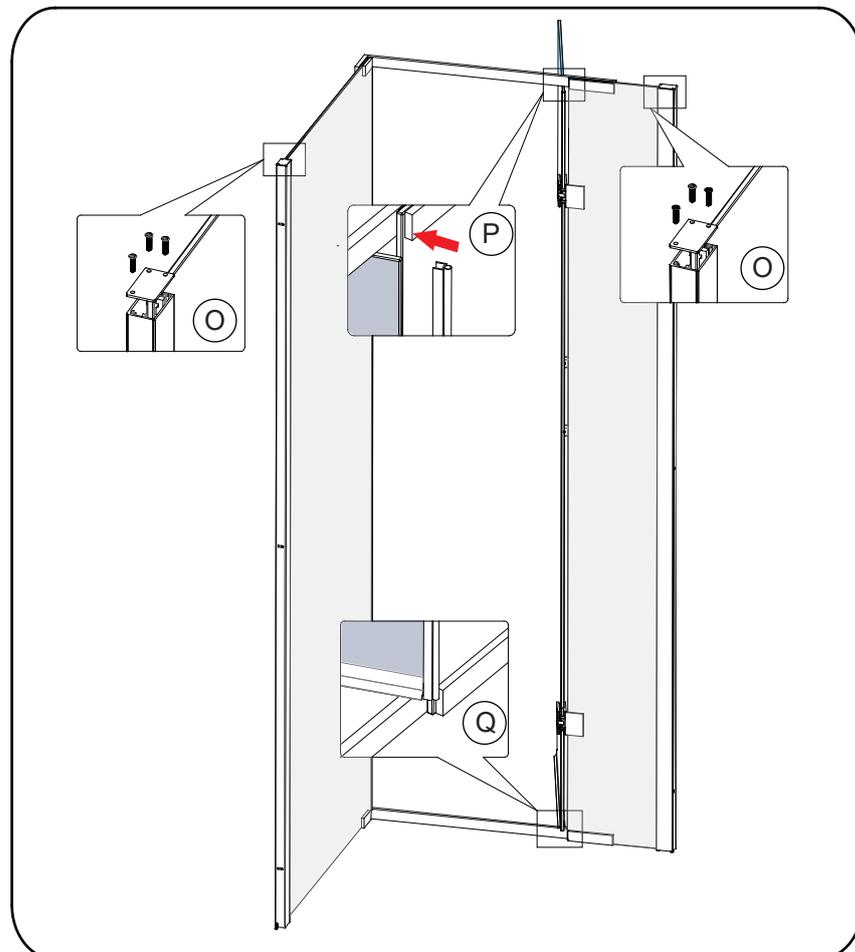


Step 10 Secure the wall profile top caps(no.17/29) onto the wall profile using screw ST3.5x20. (Diagram O).

Step 11 Fit the bubble seal(no.21) onto the door panel.(Diagram P)

Note: Bottom seal must be flush with the vertical bubble seal.(Diagram Q)

INSTALLATION INSTRUCTIONS

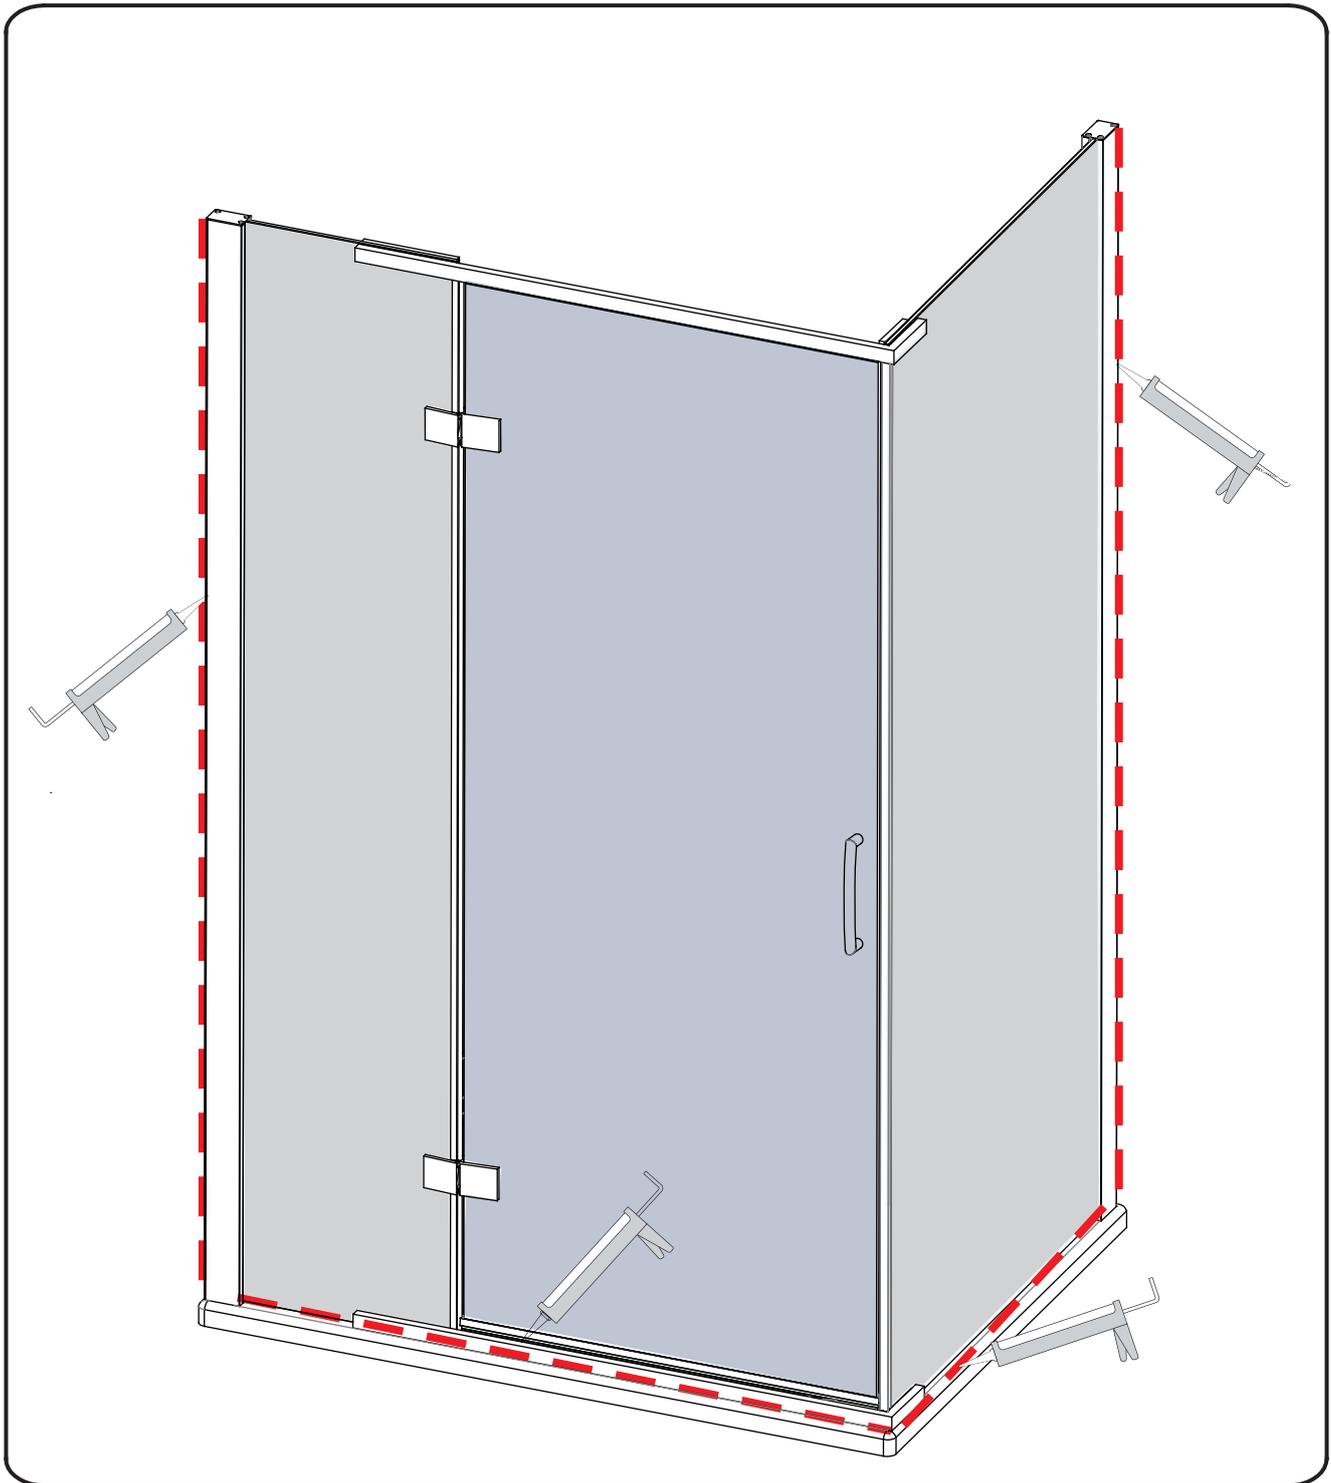

24 HRS



**DO NOT USE THE
ENCLOSURE FOR
24 HOURS AFTER
SEALING**

Applying Silicone Sealant

Sealing Inside

Seal from the top of the wall profile to the bottom on the **INSIDE** between the wall profile and the wall.

IMPORTANT: Do not apply sealant on inside of the tray.

Sealing Outside

Seal from the top of the wall profile to the bottom between the wall profile and tiles on both sides. Also seal along the bottom where the frame meets the tray. Seal the joints between the bottom profile and any upright profiles.

AFTERCARE

IMPORTANT – Cleaning and Aftercare

You should never use any abrasive cleaning supplies on your glass shower door. Additionally, it is important to wipe down all the glass and metal parts with a soft cloth after every use to remove residual water.

Do not use abrasive cleaning products that contains harsh chemicals, bleach or ammonia etc. These products will damage the glass and will corrode the shower door's frame and metallic parts over time.


Do not clean any seals with strong cleaning chemicals. Using abrasives cleaners will damage seals and can then cause them to leak. Protect the seals by only cleaning them with a mild soap and warm water after use and to prevent any build-up of chemicals and limescale.

We do highly recommend that moving parts and hinges, are checked regularly to ensure they are clean, correctly positioned and operating smoothly.

Caring for your shower door properly will ensure it lasts a long time, remember to only use warm soapy water and a soft cloth and to wipe away any soap scum etc to avoid any corrosion.

Usage

For reliable, watertight performance from the enclosure your shower head should not be positioned so that the shower sprays directly onto the enclosure door. Failure to comply with this may cause the shower to leak. Outward opening doors may cause water to drip onto the floor, please ensure that the floor covering immediately outside the enclosure will not be affected by water.

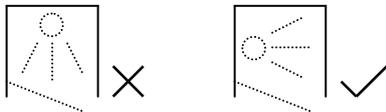

This product has been applied with an easy clean glass treatment, a protective barrier which creates a 'non-stick' surface on your glass, helping to resist lime scale build up and water spots.

Formula Bathrooms

Unit 23, Pant Industrial Estate, Dowlais, Merthyr Tydfil, CF48 2SR.

For sales/aftersales queries, please visit our website:

www.formulabathrooms.co.uk

or Sales Tel: 01685 358600, Aftersales: aftersales@formulabathrooms.co.uk

