REFLECTIONS L.E.D MIRRORS

Installation & Aftercare Instructions

REFLECTIONS

Installation & Aftercare Instructions

Retain for future reference

Retain for future reference

8

Electrical Safety

Suitable for UK Installations only.

All fittings must be installed by a competent person, in accordance with current IEE wiring regulations. If in doubt consult a qualified electrician.


Important: Always switch off the electrical supply at the mains before installation and Maintenance. It is recommended that the fuse is withdrawn or the circuit breaker is switched off for the necessary circuit before installation commences.

This product is manufactured to class I category and must have an earth connection.





Bathroom Zones

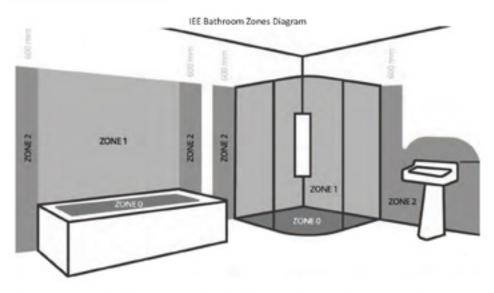

Bathroom fittings are subject to the appropriate zones in accordance with IEE Regulations. This product is **only** suitable for permanent indoor installation in **Zone 2** and outside zones. (See above) This product is **not** suitable for installation in **Zone 0** or **1**, saunas, steam rooms or shower cubicles. Do **not** connect to a trailing plug and socket. Do **not** install onto surfaces that are either damp or electrically conductive.

After Care Service

Cleaning your product: When cleaning the mirror or any mirrored surfaces it is recommended to use a soft, dry, non abrasive cloth with the mirror turned off. Do not use cleaning agents or abrasive materials.

Do not allow moisture to come into contact with any electrical components.

Troubleshooting: In the event that the mirror encounters an issue with it's operation, a reset will be required. Isolate the mirror from it's power supply for approximately 15 minutes. Then reconnect to power supply to allow recalibration.

2 Year Guarantee: We have complete confidence in this bathroom mirror and as such it is offered with a 2-year guarantee against defects in manufacture.

The guarantee requires that this product be used in the manner for which it was intended for and that it is installed and maintained in accordance with the correct fitting instructions.

The guarantee covers products in domestic use only and is not transferable. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.

Compliance: This product complies with all relevant British and European safety standards.



Operating Instructions

Please Note: Depending on choice of Reflections mirror, some features listed will not be available.



On/Off: To turn product On/Off, press the Power Button firmly with your thumb for 1-2 seconds.



Clock: To operate, press the Clock Button firmly with your thumb for 1-2 seconds.

To adjust time, hold button down until flashing. Tap button until desired hour is reached, then wait until the minutes flash and repeat process.

Colour Temperature: To adjust colour temperature of L.E.D. lighting, press the Colour Temperature button firmly with your thumb until desired colour is reached.

Installation Procedure


Important: Before starting the installation process, make sure the electrical supply is switched off. It is recommended that the fuse is withdrawn or the circuit breaker is switched off for the necessary circuit.

Important: Before starting the installation process, ensure the wall construction is suitable and can support the weight of the mirror.

Note: The wall plugs supplied are suitable for solid stone / brick walls. For any other wall material use specialist wall plugs.

- 1) Measure the distance (X) between the keyhole slots on the back of the mirror.
- Mark out the fixing screw positions on the wall using a pencil to the desired height, ensuring they are spaced at distance (X).








Dimmer: To adjust brightness of L.E.D. lighting, press the Brightness Button firmly with your thumb until desired brightness is reached.

Installation Procedure

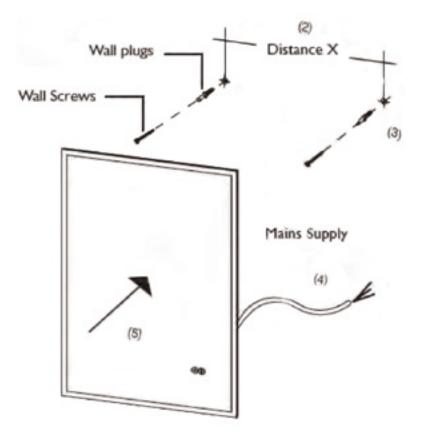

- Drill the marked out positions and fit the wall plugs accordingly. Fix the screw into position, leaving a small amount of the screw head proud of the wall for hanging.
- 4) Make the electrical connection from the mirror to the mains supply. Use the connection wire found at the rear of the mirror to make the necessary connections in accordance with the current IEE regulations. A second person will need to hold the mirror in place whilst electrical connections are made.
- The mirror should easily slide onto the fixing screws and secure into place.

NOTE: To secure the mirror further, a small amount of silicone sealant can be applied to the side of the extrusions to prevent the mirror being accidentally pulled away from the wall.

To remove the mirror, the mirror should first be lifted and then pulled away from the wall.

Installation Procedure

NOTE: Installation for ROUND Mirrors

The outer layer is a white backing cover. The screws must be driven through the keyhole shaped hole and more than 5mm deep through to the metal backing. This will allow the mirror to be hung stably on the wall.

